
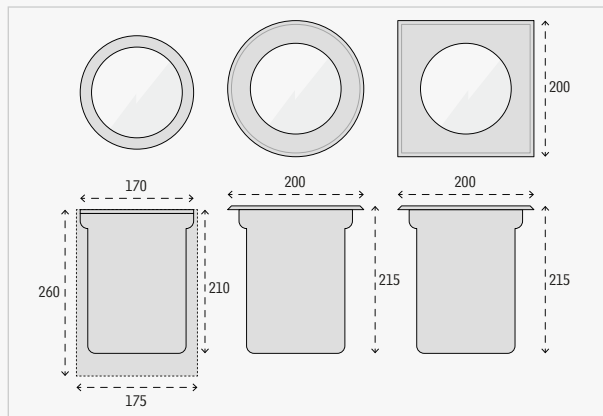


## Recessed spotlight

# 4.0198

- Protection class IP67
- Protection class IP69 - protection against high pressure and high jet water temperatures
- Entirely made of stainless steel 316Ti 1.4571
- Flush-mounted cover or round and square cover, height 5 mm ...
- POW-LED cold white, warm white, neutral white, 230 V
- POW-LED RGB CC
- Rotation-symmetric light distribution
- 360° pivotable et +/-15° adjustable
- ...
- Temperature-resistant silicon seal
- Toughened safety glass (ESG) – withstands loads of up to 1500 kg
- Cable gland PG13,5, nickel-plated brass
- Supplied with light source and 3 m of underwater cable

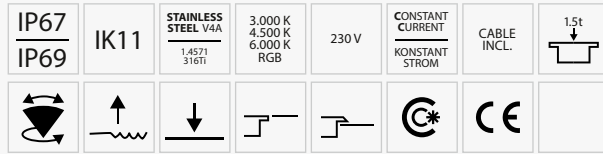

## Additional parts

glass disc, frosted for softer light distribution (light loss approx. -15%) <b>4.0066.01.00</b>	anti-glare louvre black, for POW-LED <b>4.0003.02.01</b>	Anti-skid coating <b>4.0066.02.00</b>	double cable gland PG13,5, brass <b>4.0004.00.13</b>	Installation housing out of 316Ti stainless steel <b>4.0198.10.95</b>
--	---	--	---	--

## Monochrome and dynamic illumination

Cover	#	Color	Lumen	LED	Watt	Power	Beam	Cable	Temp.	Connect → 208
Flush cover	<b>4.0198.10.01</b>	6000K cold white	1980 lm	12 POW-LED	total 15 W	230V	30° medium	UW, 3x1,5 qmm	< 40°C	Inclusive (230 V)
	<b>4.0198.10.02</b>	3000K warm white	1620 lm							
	<b>4.0198.10.03</b>	4500K neutral white	1860 lm							
Round Cover	<b>4.0198.20.01</b>	6000K cold white	1980 lm							
	<b>4.0198.20.02</b>	3000K warm white	1620 lm							
	<b>4.0198.20.03</b>	4500K neutral white	1860 lm							
Square Cover	<b>4.0198.40.01</b>	6000K cold white	1980 lm							
	<b>4.0198.40.02</b>	3000K warm white	1620 lm							
	<b>4.0198.40.03</b>	4500K neutral white	1860 lm							
Flush cover	<b>4.0198.10.09</b>	RGB		12 POW-LED	all on 19 W	CC 350 mA	30° medium	UW, 6x1,0 + 2x0,5 qmm	< 40°C	5.0635.09.16 max 1 5.0635.09.50 max 3
Round Cover	<b>4.0198.20.09</b>	RGB								
Square Cover	<b>4.0198.40.09</b>	RGB								

## Notes

- Protection class IP68 (fully ready for operation with light source and cables)
- POW-LED with beam angle spot 10°, medium 30°, wide 45°, flood 90° and elliptical 15x40°
- POW-LED, series-connected
- In case of use of an housing, cable gland must be mounted on the ground. (Please state!)
- In public areas we recommend to use a non-slip glass. See accessories.
- Versions with HIT lamp available