






RECESSED SPOTLIGHT 4.4000

EXTERIOR

IP67

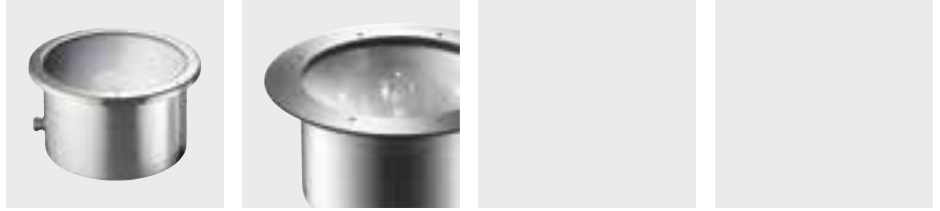

ø 410

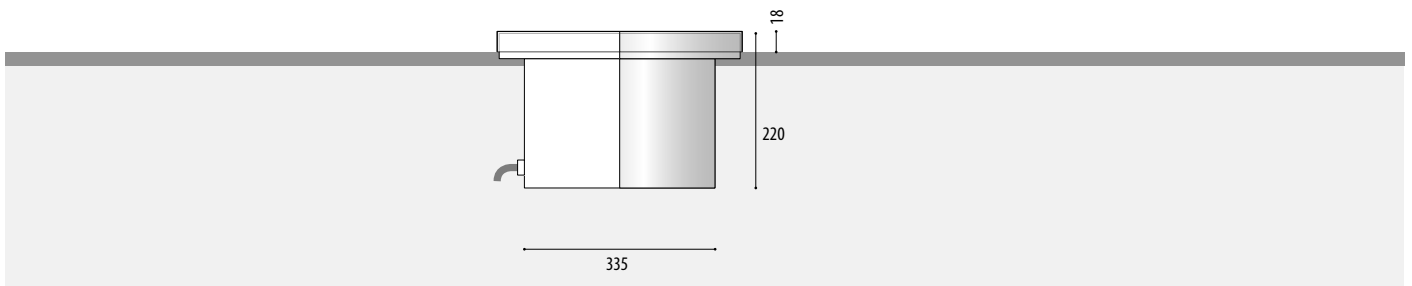

335

Article number	Lamps	Wattage	Voltage	Socket	Temperature	Radation angle	Cable	[V]
SYMMETRIC REFLECTOR, CLEAR TEMPERED GLASS LENS								
4.4000.00.15	HIE	150W	230V	E27	110°C		Si, 3x2,5 qmm	L75
4.4000.00.71	HSE-E	50/70W	230V	E27	80°		Si, 3x2,5 qmm	R72
ASYMMETRIC REFLECTOR, CLEAR TEMPERED GLASS LENS								
4.4000.01.15	HIE	150W	230V	E27	110°C		Si, 3x2,5 qmm	L85
4.4000.01.71	HSE-E	50/70W	230V	E27	80°		Si, 3x2,5 qmm	R82



4.4000 | RECESSED SPOTLIGHT


FOR WIDE ILLUMINATION BUILDINGS AND OUTDOOR FACILITIES.

IP67
STAINLESS STEEL V4A
1.4571
316Ti
230 V
EXCL
CABLE EXCL
650kg
↑
↓
⏏
CE




- Protection system IP67
- Entirely made of stainless steel 316Ti 1.4571
- ...
- HIE, HSE
- Marine grade 316Ti stainless steel reflector
- ...
- Temperature-resistant silicon seal
- Toughened safety glass (ESG) – withstands loads of up to 650 kg
- Cable gland PG 16/24, nickel-plated brass
- With integral ballast device
- Supplied without light source and without cable

+ ADDITIONAL PARTS



anti-glare louver

4.0008.01.00



glass disc, frosted
for softer light distribution (light loss approx. -15%)

4.0230.41.00

Power supplies Technical details see from page 234.

Integrated

Integrated

Integrated

Integrated

🔄 OPTIONS

IP68

Protection system IP68 (fully ready for operation with light source and cables)

CUSTOM MADE

Round attachment cover available

CUSTOM MADE

special designs available



Coloured HIT light sources available



Please order the double cable gland for ring assembly separately